

SENER S917 Android 8.1 os Ultra-thin Rugged Tablet

S917 Rugged Tablet PC with Octa-core, dual SIM and 4G communication. It is with 1920*1200dpi high resolution, 8" touch screen, Android 8.1 OS. 1D/2D barcode reader, NFC UHF RFID are optional. Support Dual Bands WIFI, Bluetooth, GPS+BDS+Glonass and other functions.





S917 rugged tablet



**Product Description
SPECIFICATIONS**

Standard function	
Operating System	Android 8.1
CPU	SDM630, 8 core CPU, 2.2GHz
GPU	Qualcomm® Adreno™ 506 GPU,650Mhz
RAM	RAM: 3GB
	FLASH: 32GB
Extended Storage	Micro SD, Maximum 128G
USB port	5 pin MicroUSB; Support to connect U-disk/Mouse/Keyboard/OTG line
OTG	Through OTG can meet 100M network port, network card setup, PPPoE dial-up, web browsing. Support OTG extend RS232 serial port/485 serial port/RJ45 Serial port
External port	Charge port, headphone port
Protection Grade	
Industrial Protection Grade	IP65
Drop Grade	Drop resistance from 1.2m
Wireless Communication	
Bluetooth	Support 4.1
GPS	GPS+BDS+A-GPS+GLONASS
	High precise GPS: NEO-6M
	GPS+BDS: NEO-M8N
	GPS+GLONASS: NEO-M8N Accuracy 4m
WIFI	Support IEEE 802.11a/b/g/n/ac (2.4G and 5G bands)
2G/3G/4G LTE	GSM 850/900/1800/1900 B5/B8/B3/B2 WCDMA 2100/1900/1700 B1/B2/B4 TD-SCDMA B34/B39 FDD-LTE: B1/B3/B5/B7/B8 2100/1800/850/2600/900 TDD-LTE : B38/B39/B41/B40/ Band38:2570 MHz - 2620 MHz Band39: 1880 MHz - 1920 MHz B41:2555-2655MHz B40/:2300-2400MHz
Physical Parameters	
Display Screen	8 inch LCD screen,1920*1200IPS screen, capacitive touch screen
Keyboard	Android menu, Homepage, Return, Volume, Barcode, ON/OFF, Reset

Camera	5 million pixels front camera, 13 million pixels rear camera with automatic focus and lighting function
Googleplay store	Support
Gravity Sensor	Support
Compass	Support
Vibrating motor	Support
Rechargeable Lithium Battery	3.8V, 6000mAh
Standby	About 500 hours
Working time	About 8 hours
Dimension	229.4*136.2*11.5mm
Weight	510g
Environmental Characteristics	
Working Temperature	-10°C ~ +50°C
Storage Temperature	-40°C ~ +60°C
Humidity	5%-95% relative humidity; no condensation
Optional function	
Barcode Scanning	1D Laser Scanner Index(Internal or Jacket): Honeywell N4313 or Zebra EM1350 Scanning speed: 104 times/second+12 times/second (two way scanning) Scanning distance: 2.5cm-114.3cm Scanning angle: 47±3°(default) /35±3°(reduced code)
	2D Barcode Scanner Index(Internal or Jacket): Newlands EM3096 Honeywell N3680 Zebra SE2100 Identification ability: 1D, 2D, OCR Scanning angle: rotate 360°, incline±50°, deflection ±50° Field of View: Horizontal 36°, vertical 23° Depth of field: 4cm-23.5cm Environmental luminance: 0~100,000 LUX
RFID	HF RFID(Internal):

Support NFC/NXP, 13.56MHz ISO14443A,B and ISO15693 protocol, reading distance 0-3cm, Tag support type:SR176,SR1X4K(TYPE-B),I-Code2,TI RFID Tag-it HF-I,EM4034,Mifare Classic ETC


External

Supports EPC C1 GEN2/ ISO 18000-6C and ISO 18000-6B/6C protocol

Reading distance:2M/4M

Frequency:865-868Mhz or 920-925Mhz

Ceramic antenna: 0.3db(25*25*4mm)

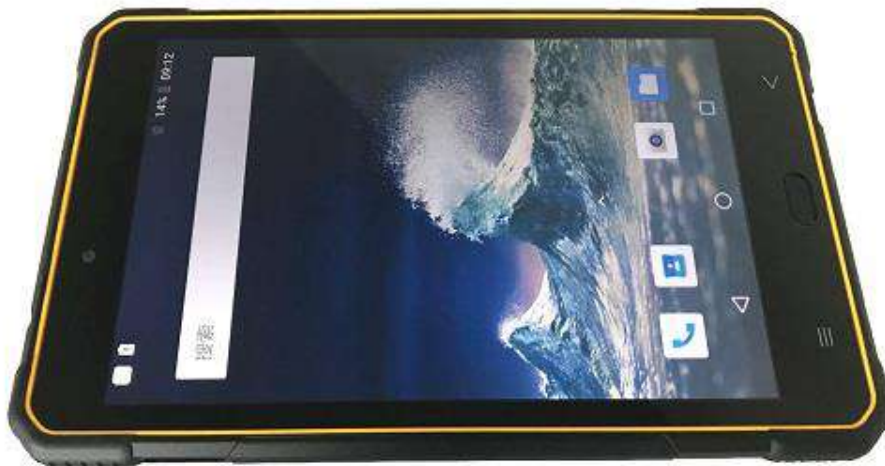

Customized optional functions in Jacket:

1D/ 2D Barcode scanner and Long reading distance UHF RFID reader



Please visit <https://youtu.be/q40nuRckkw0> for the video

Our Services

OEM

1. Boot Animation
2. Brand/Logo on Tablet
3. Gift box design



SDK Free