


CD/DVD inlay



PROTOCOL:	EPC Class 1 Gen 2 / ISO 18000-6C
OPERATING FREQUENCY:	Global 860-960 Mhz
ANTENNA SIZE:	Ø 32 mm
INTEGRATED CIRCUIT:	Impinj Monza 4D/4E/4QT
EPC MEMORY:	From 128 bits to 496 bits
USER MEMORY:	From 32 bits to 512 bits




CD/DVD INLAY COMMON APPLICATIONS

- Library, media, documents and files

INLAY GENERAL DIMENSIONS

DRY INLAY

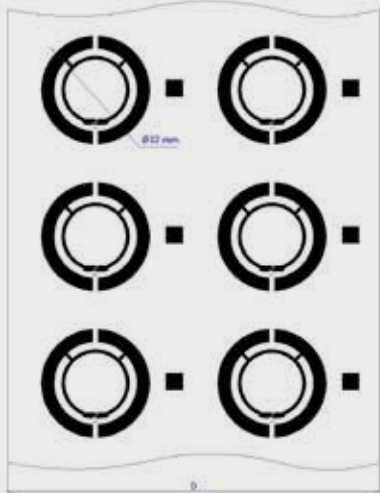

A- Inlay Width	32 mm
B- Inlay Length	32 mm
C- Inlay Pitch	43,3 mm
D- Web Width	110 mm



DRY INLAY = 50 µm PET + 150 µm die

WET/WHITE-WET INLAY



E- Label Width	36 mm
F- Label Length	36 mm
G- Label Pitch	43,3 mm
H- Web Width	42 mm



GENERAL CHARACTERISTICS OF INLAY

Operating Temperature Range	-40° C to +85° C at 40-80% RH
Storage Temperature	-40° C to +85° C at 40-80% RH
Electrostatic Discharge (ESD) tolerance	2.000V HBM (Human Body Model)

REEL DETAILS

Inner core diameter	76 mm
Outer core diameter	190 mm
Bending Diameter	≥ 50mm, tension less than 10 N
Average # of units per roll	3.000 pieces
Quality	100% performance tested
Available formats	Dry, wet, tag

CARE AND HANDLING: RFID inlays are sensitive to ESD. Observe standard practices to keep environmental static charge to a minimum.
APPLICATIONS: This product should be tested by the customer/user thoroughly under end use conditions to ensure the product meets the particular requirements.

PRODUCT CHANGES: Trace-Tech Id Solutions reserves the right to modify, change, supplement or discontinue product offerings at any time without notice.